
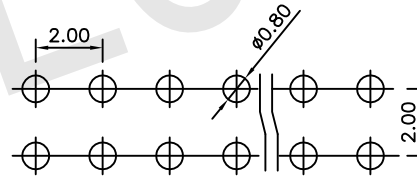


FH200-2XX-XXX

Female Header
 Pitch 2.00mm
 Dual Row

Type1/Type2


 No. of Pins
 Dual Row: 2~40

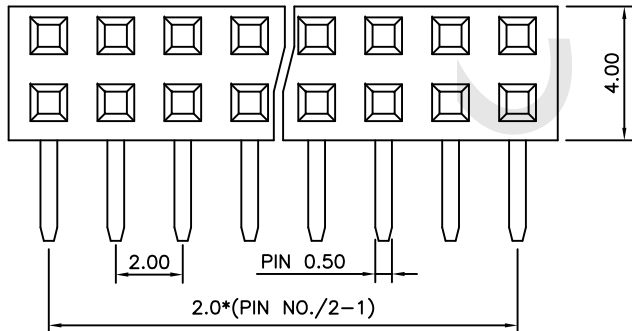

PRODUCT SPECIFICATION

1. INSULATOR MATERIAL : POLYESTER, UL94V-0 .
2. TERMINAL MATERIAL : COPPER ALLOY .
3. FINISH : GOLD OR TIN PLATED.
4. CURRENT RATING : 2 AMPERE.
5. INSULATION RESISTANCE : 1000M OHMS MIN.
6. DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
7. CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
 测试后 Final : 40 m Ohm Max. .
8. OPERATING TEMPERATURE : - 40°C to +105°C.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	0801092016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
		CHEK	08Jan2016		
		APVD	08Jan2016	NAME Female Header 2.00mm*7.20mm Dual Row Right Angle Type	
		Abel	08Jan2016		
		PRODUCT SPEC	—	SIZE	DRAWING No.
		WEIGHT	—	A4	YL-ED-XXX
		CUSTOMER DRAWING	—	SCALE	1 : 1
				SHEET	1 OF 1



THIRD ANGLE PROJECTION

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± 0.50
1 PLC	± 0.30
2 PLC	± 0.20
3 PLC	± 0.15
4 PLC	± -
ANGLES	± 3°