
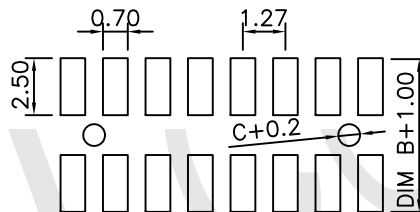


FH127-2XX-XXX
 Female Header
 Pitch 1.27mm
 Dual Row
 Type1/Type2

 No.of Pins
 Dual Row:3~50

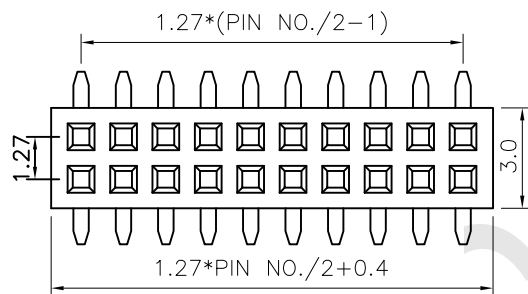



PRODUCT SPECIFICATION

- 1.INSULATOR MATERIAL : POLYESTER, UL94V-0 .
- 2.TERMINAL MATERIAL : COPPER ALLOY .
- 3.FINISH : GOLD OR TIN PLATED.
- 4.CURRENT RATING : 1 AMPERE.
5. NSULATION RESISTANCE : 1000M OHMS MIN.
6. DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
7. CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
 测试后 Final : 40 m Ohm Max. .
8. OPERATING TEMPERATURE : - 40°C to +105°C.

DIM A	DIM B
2.00	4.50
3.40	4.80
4.30	4.80

DIM A	C
2.00	
3.40	
4.30	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 0801092016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
 THIRD ANGLE PROJECTION		CHEK 08Jan2016		
		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°		APVD Abel 08Jan2016
 THIRD ANGLE PROJECTION		PRODUCT SPEC -	SIZE A4	SCALE 1 : 1
		WEIGHT -	CUSTOMER DRAWING	SHEET 1 of 1

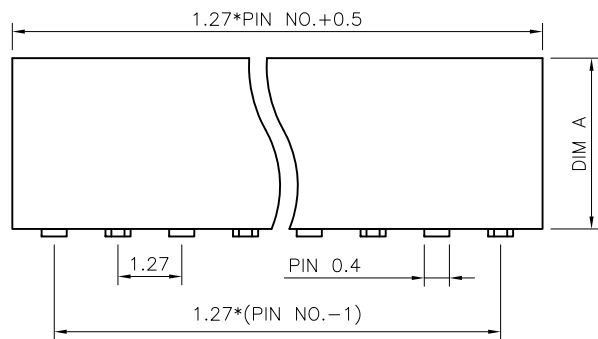


FH127-1XX-XXX
 Female Header
 Pitch 1.27mm
 Single Row



Type1/Type2

 No.of Pins
 Dual Row:2~50

Type 1

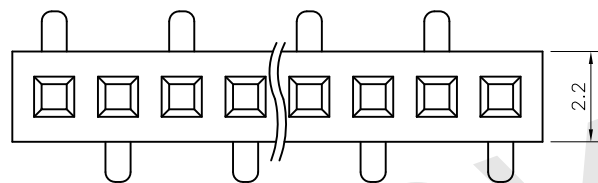

Type 2

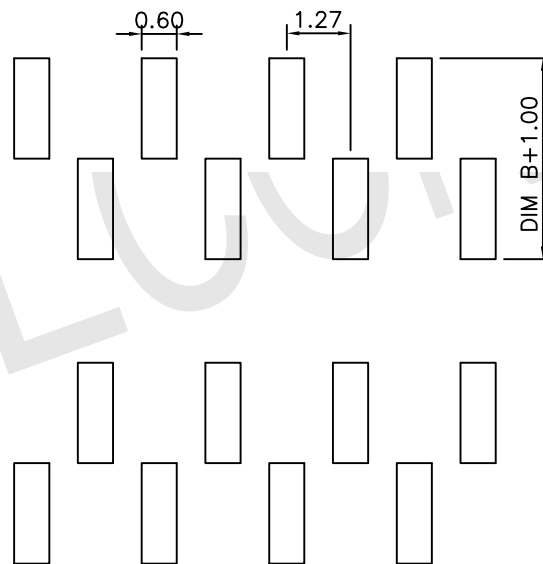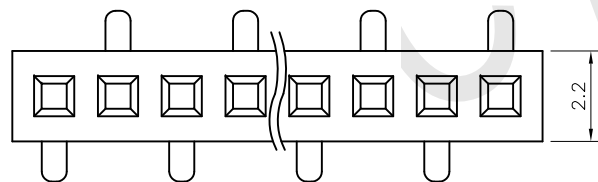

PRODUCT SPECIFICATION

- 1.INSULATOR MATERIAL : POLYESTER, UL94V-0 .
- 2.TERMINAL MATERIAL : COPPER ALLOY .
- 3.FINISH : GOLD OR TIN PLATED.
- 4.CURRENT RATING : 1 AMPERE.
5. NSULATION RESISTANCE : 1000M OHMS MIN.
6. DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
7. CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
测试后 Final : 40 m Ohm Max. .
8. OPERATING TEMPERATURE : - 40°C to +105°C.

DIM A	DIM B
2.00	3.40
3.40	3.60
4.30	3.60

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 0801092016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD												
		CHEK 08Jan2016													
<p>THIRD ANGLE PROJECTION</p>		<p>TOLERANCES UNLESS OTHERWISE SPECIFIED:</p> <table border="0"> <tr><td>0 PLC</td><td>± 0.50</td></tr> <tr><td>1 PLC</td><td>± 0.30</td></tr> <tr><td>2 PLC</td><td>± 0.20</td></tr> <tr><td>3 PLC</td><td>± 0.15</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> </table>		0 PLC	± 0.50	1 PLC	± 0.30	2 PLC	± 0.20	3 PLC	± 0.15	4 PLC	± -	NAME Female Header 1.27mm Single Row SMT Type	
		0 PLC	± 0.50												
1 PLC	± 0.30														
2 PLC	± 0.20														
3 PLC	± 0.15														
4 PLC	± -														
		APVD AbeI 08Jan2016	DRAWING No. YL-ED-XXX												
		PRODUCT SPEC -	SIZE A4												
		WEIGHT -	SCALE 1 : 1												
		CUSTOMER DRAWING	SHEET 1 of 1												