


YL014-008-XXX

Dual Row
004:04Pin
006:06Pin

080:80Pin

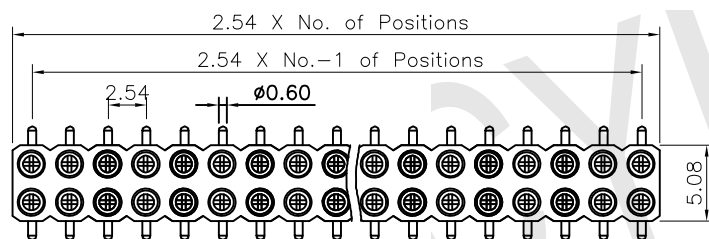

DIM H
6.00
7.00
8.00

产品规范 PRODUCT SPECIFICATION

1. 绝缘材质 INSULATOR MATERIAL : POLYESTER, UL94V-0.
2. 端子材质 TERMINAL MATERIAL : COPPER ALLOY.
3. 端子电镀 FINISH : GOLD OR TIN PLATED.
4. 额定电流 CURRENT RATING : 3 AMPERE.
5. 绝缘阻抗 INSULATION RESISTANCE : 1000M OHMS MIN.
6. 耐电压 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
7. 接触阻抗 CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
测试后 Final : 40 m Ohm Max..
8. 操作温度范围 OPERATING TEMPERATURE : - 40°C to +105°C.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	08Jan2016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
 THIRD ANGLE PROJECTION		CHEK	08Jan2016		
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Abel	08Jan2016
0 PLC	± 0.50	PRODUCT SPEC		SCALE 1 : 1	
1 PLC	± 0.30	WEIGHT		SHEET 1 OF 1	
2 PLC	± 0.20	CUSTOMER DRAWING			
3 PLC	± 0.15				
4 PLC	± -				
ANGLES ± 3'					