


YL014-XXX-XXX

Machine Pin

009: Dual Row  
006: Single Row



Single Row	Dual Row
002:02Pin	004:04Pin
003:03Pin	006:06Pin
*****	*****
040:40Pin	080:80Pin

2.54 X No. of Positions

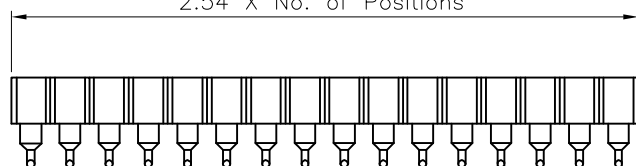


产品规范 PRODUCT SPECIFICATION

- 绝缘材质 INSULATOR MATERIAL : POLYESTER, UL94V-0 .
- 端子材质 TERMINAL MATERIAL : COPPER ALLOY .
- 端子电镀 FINISH : GOLD OR TIN PLATED.
- 额定电流 CURRENT RATING : 3 AMPERE.
- 绝缘阻抗 INSULATION RESISTANCE : 1000M OHMS MIN.
- 耐电压 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
- 接触阻抗 CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;  
测试后 Final : 40 m Ohm Max. .
- 操作温度范围 OPERATING TEMPERATURE : - 40°C to +105°C.

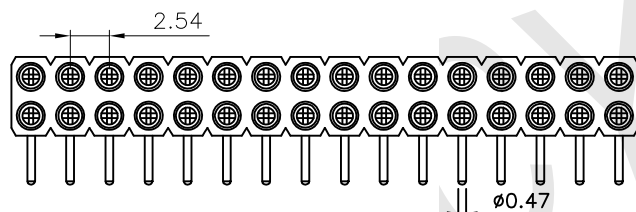

2.54 X No. of Positions

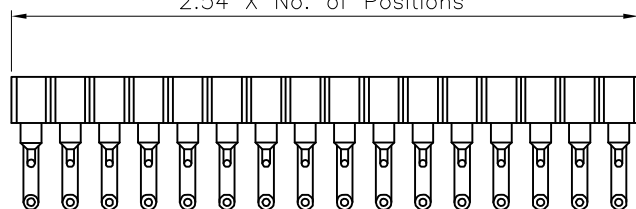

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	08Jan2016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD				
		CHEK	08Jan2016					
<p>THIRD ANGLE PROJECTION</p>		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME				
		0 PLC	± 0.50	Machine Female Header 2.54mm Right Angle Type				
		1 PLC	± 0.30	SIZE	DRAWING No.			
		2 PLC	± 0.20	A4	YL014-XXX			
3 PLC	± 0.15	PRODUCT SPEC			SCALE	1 : 1	SHEET	1 OF 1
4 PLC	± -	WEIGHT						
ANGLES	± 3'	CUSTOMER DRAWING						